



30LC H4

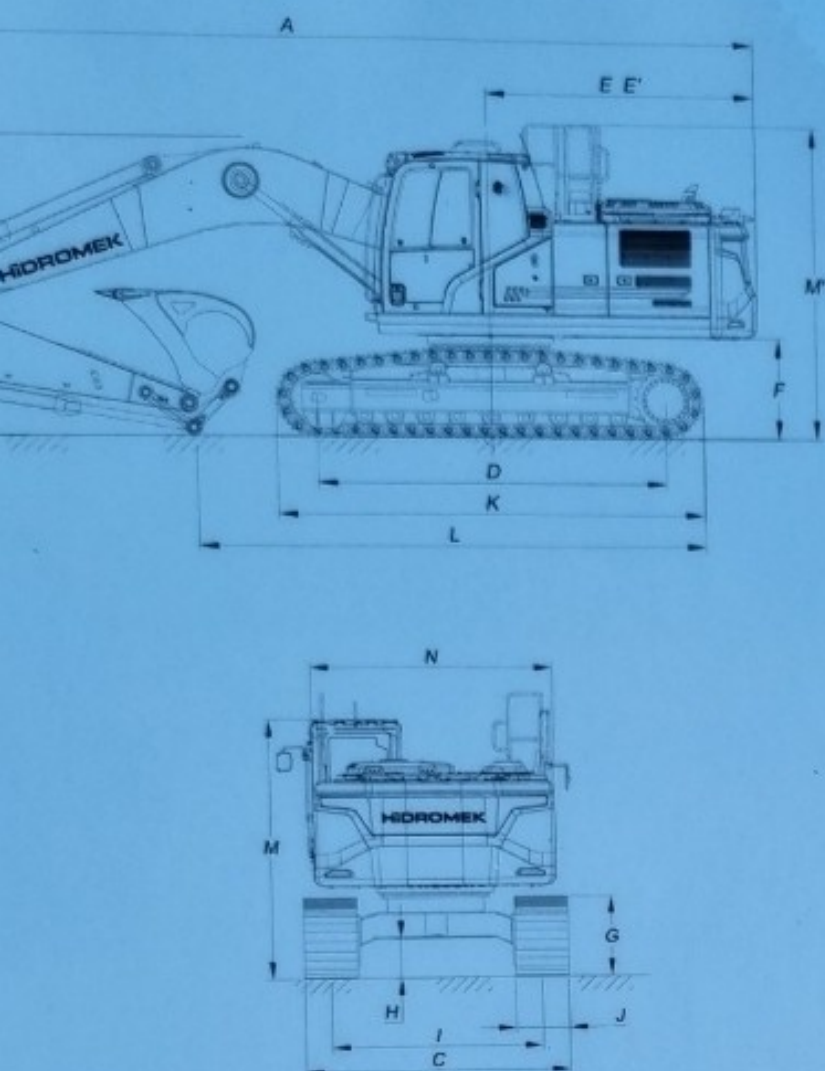

LA DIMENSIONER

	5.70 mm	
	*2.92 mm	2.40 mm
	9.740 mm	9.680 mm
	3.330 mm	
	2.990 mm	
	3.640 mm	
	2.810 mm	
	2.830 mm	
	1.065 mm	
	935 mm	
	465 mm	
	2.390 mm	
	600 mm	
	4.460 mm	
	5.320 mm	5.920 mm
	3.010 mm	
	2.740 mm	

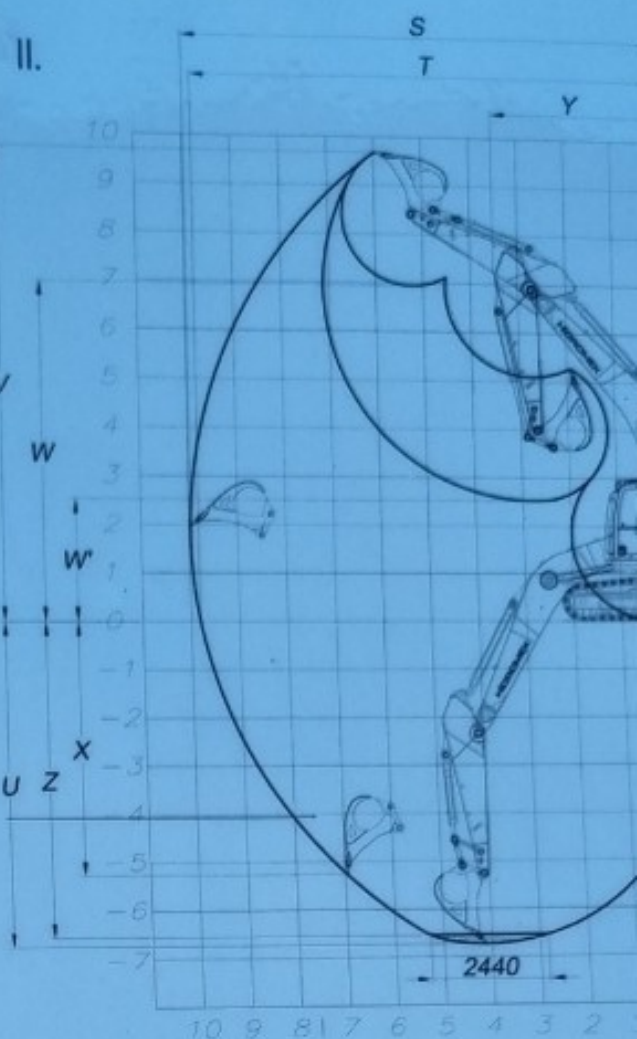

II. ARBETSSOMRÅDE

Bom		*2.92
Sticka		9.980
S - Max.räckvidd		9.810
T - Max.räckvidd i markplan		6.730
U - Max.grävdjup		9.680
V - Max.grävhöjd		6.950
W - Max.tömningshöjd		2.520
W' - Min.tömningshöjd		5.25
X - Max.vertikal grävdjup		3.52
Y - Min.svängradie		6.54
Z - Max. grävdjup 2440mm level)		

* Standard

III. GRÄVPRESTANDA

Kapacitet standardskopa (SAE)
Grävkraft (Power Boost) ISO
Brytkraft (Power Boost) ISO